

Lena Wall Hung Boiler

L150 and L250

Technical Data

FEATURES

- Condensing technology
- Type A Appliance
- Stainless steel heat exchanger (AISI 304L)
- Wide modulating range (1 : 20)
- Modular solutions suitable for 50kW up to 500kW
- Integrated primary pump and hydraulic manifolds
- Cascade regulation & sequencing. Modbus RS485
- Webvisor accessory for remote supervision of heating plant
- External or internal installation options

		Forza 150	Forza 250
Order Code		F150	F250
Heat Output Max, 50/30	kW	160.2	267
Gas Consumption	MJ/hr	594	990
Eff 100% Pn - 80/60	%	98.37	98.37
Eff 100% Pn - 50/30	%	106.8	106.8
Eff 30% Pn - 80/60	%	102.8	102.8
Eff 30% Pn - 50/30	%	108.83	108.83
Max. Operating Pressure	kPa	300	300
Min. Operating Pressure	kPa	30	30
Flow & Return Connections	mm	DN65 PN6	DN65 PN6
Gas Connection (G)	mm	DN40 PN6	DN40 PN6
Condensate Connection	mm	Ø40	Ø40
Height	mm	1455	1455
Depth	mm	582	582
Width	mm	1289	2096
Weight	kg	219	350
Flue Outlet 50kW Module	mm	Ø80	Ø80
Flue Outlet 100kW Module	mm	Ø100	Ø100
Noise Rating	dB	52	52
Adjustable CH Range	°C	30-80 / 25-45	30-80 / 25-45
Max. Operating Temp.	°C	95	95
Max Absorbed Power	W	216	540
Elec Consumption - boiler off	W	10.5	14

The Lena packages utilise 50kW & 100kW wall hung condensing boilers and are used for heating purposes.


These packages are supplied in component form and are suitable for internal installations only. Assembly of the framework, pipework and mounting of the boilers is done onsite when in the required location.

The composition of the cascade system provides for the free combination of the individual boilers connected by means of hydraulic manifolds for the gas, flow and return connections

The Lena range features integrated primary pumps with PWM control which works in conjunction with the PCB, fan and burner to control the ΔT and maximise efficiency.

With multiple configurations and installation options, the Lena series is the perfect solution for purposes such as underfloor heating, pool/spa heating, HVAC applications and DHW via an Aleabrax heat exchange tank.

Lena 150 & 250

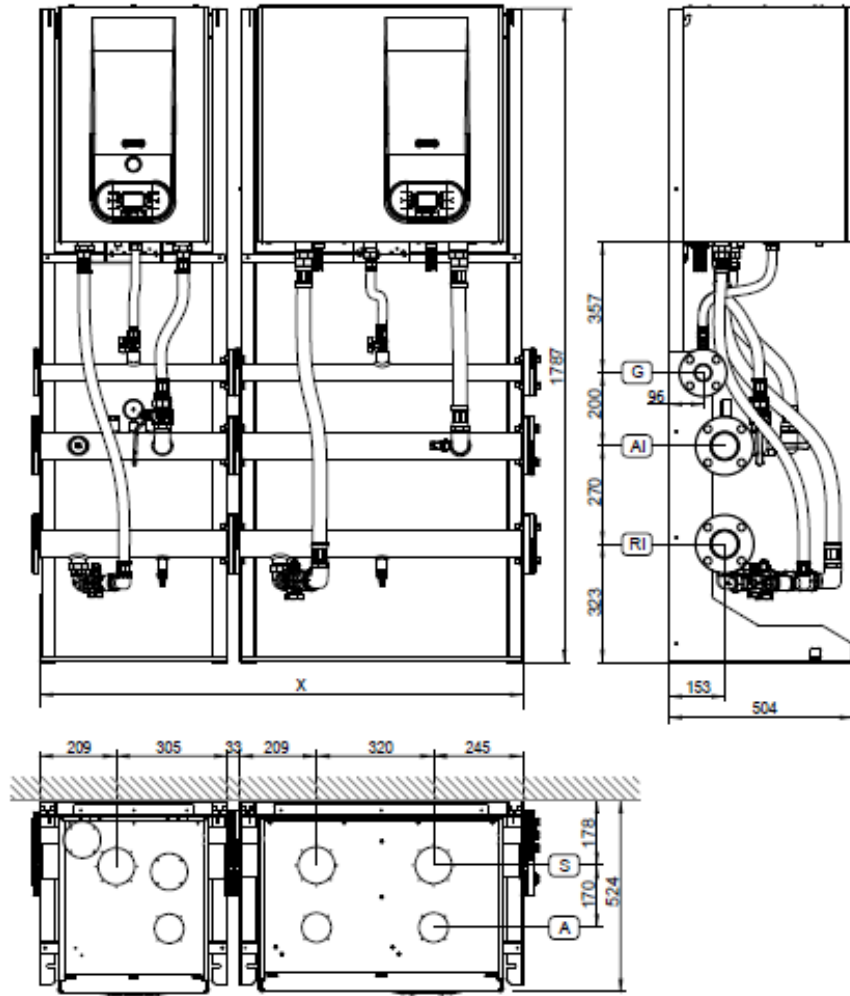

Installation Options

With cascade installation systems it is possible to discharge combustion emissions in only one flue duct using flue manifold kit.

Flue manifold are in polypropylene material (PP) to guarantee the highest mechanical resistance to the chemical action of the condensate and an easy installation.

Each individual boiler can be connected to the main manifold through the appropriate connector equipped with a mechanical non-return damper to avoid a flow back of combustion products when one or more boilers are not in operation.

Please refer to the installation manuals for more information

Accessories	Order Code
Easy Remote for Aleabrax Condensing Appliances	40-00017
Sensor Outdoor Temperature Weather Compensation	73518LA
Sensor Manifold and Mixing Circuit	40-00345
Sensor DHW Storage Cylinder	40-00346
Sensor Solar Collector	31409LA
Cascade Regulator ModBus DDC-mPID4DISP2	65-00579
WebVisor - Cascade System Remote Controller	40-00355
Hydraulic Compensator Kit DN150 ≥ 300 kW 65mm Fittings	26285LP
Condensate Neutraliser Box - up to 350kW	82153LA

Care has been taken to ensure that all information is as accurate as possible at the time of publication. However, specifications, methods and figures are subject to change without prior notice.

For more information visit:

aleabraxsystems.com.au

or call 1300 132 949

Rev. 12/18

Local Distributor: